
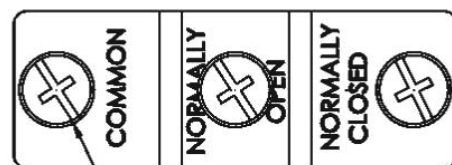
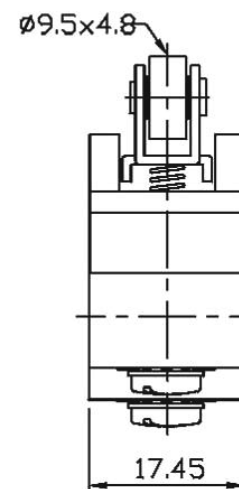


CHARACTERISTICS		Rating	15A 125VAC or 250VAC
		Terminal	SCREW
Contact resistance	15mΩ max. (initial)	Item No.	Z15G1703
Insulation resistance	100MΩ min. (at 500 VDC)	OF max.	100g
Dielectric strength	1,000 VAC,50/60Hz for 1 minute between	RF min.	22g
		PT max.	7.1mm
Mechanically service life	1,000,000 operations min.	OT min.	4mm
		MD max.	1.02mm
Electrically service life	100,000 operations min.	FP max.	36.6mm
		OP	30.2±0.8mm

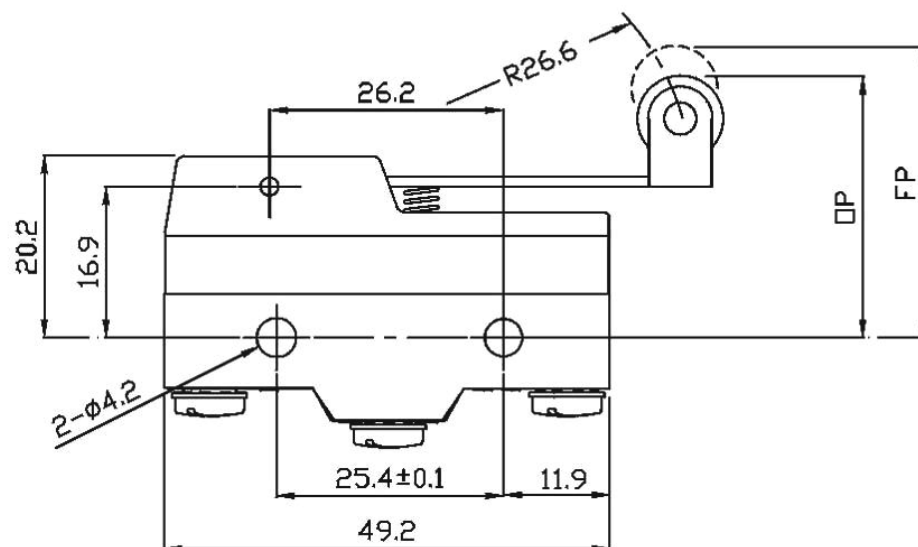

3-M4X5.0
Terminal Screw
with toothed lock washer

0.000°±0.25°	0.000±0.005	DRAWN	DATE
0.00°±0.5°	0.00±0.10	ARTHUR	2003/03/18
0.0°±1°	0.0±0.20	CHECKED	DATE
0°±2°	0±0.50	APPROVER	DATE
ANGULAR	LINEAR	SCALE	2.5 : 1

B		I. The screw change from cap screw to toothed lock washer		ARTHUR		2003/03/18
A		FIRST ISSUE		H.J.L		2000.04.29
ISS	NOTE	DESCRIPTION	GRID	DRW	APP	DATE
喜威達企業股份有限公司						
SWEETA PRODUCTS CORPORATION						
TITLE:						
SZ15G1703 CHARACTERISTICS						
FINISH						
MATERIAL:						
DWG NO.					A3	