

SPA-307R-□-□-□

SWITCHING ACTION

☐ A (ON-OFF Lock)	☐ B (MOM-OFF (non lock))
☐ AL (ON-OFF Lock (With Lamp))	☐ BL (MOM-OFF non Lock (With Lamp))

CAP COLOR

☐ G (green)	☐ R (red)
☐ BL (blue)	☐ Y (yellow)





LAMP VOLT

- ☐ 6V
☐ 12V
☐ 24V
☐ 110V
☐ 220V

General specifications

Circuit	: PUSH ON
Rating	: A.C. 125V 3A
Contact R.[max]	: D.C. 5V 1A 30mΩ
Insulation R.[min]	: D.C. 500V 100MΩ
Withstand VOL.	: A.C. 500V 1minute
Operating force	: 250±50g
Life cycle[max]	: 40,000 CYCLES

Schematic

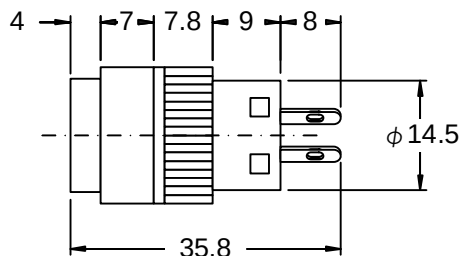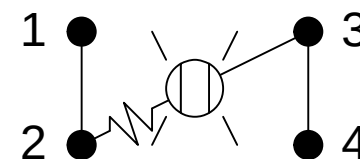

材質：
 底座--尼龍6+30%纖
 上蓋內襯和本體--PC

喜威達企業股份有限公司
 SWEETA PRODUCTS CORPORATION
 23552 新北市中和區中正路799號1樓
 Tel : 02-2226-8001 Fax : 02-2226-8002
 http://www.sweeta.com.tw E-mail: sweeta.tw@msa.hinet.net

比例 SCALE

單位 DIMENSION mm

DO NOT SCALE DRAWING
TOLERANCES UNLESS OTHERWISE

UP TO 10	±0.3
ABOVE 10 TO 100	±0.5
ABOVE 100	±0.8
ANGULAR DIMENSIONS	±5°

品名 TITLE

PUSH BUTTON SWITCH

型號 MODEL

SPA-307R□-□-□

繪圖
DRAWN

307 B

核准
APPROVED

A

版次
REVISION

日期
DATE

2007/04/20