








Rating	10A 125V, 6A 250VAC 1/2HP 125V~250V	 Thickness: 0.7~3.0	 R=150KΩ NEON
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1500V 1 minute		
Operation Temperature	-25°C ~ 85°C		
Switch Function	4P DPST (ON)-OFF		

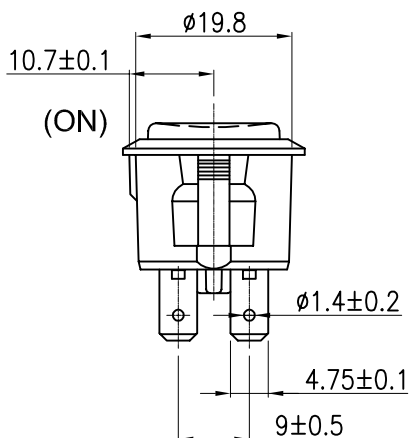

Material:
Frame: Black, Nylon 66
Actuator: Red, PC
Terminals: Copper Alloy

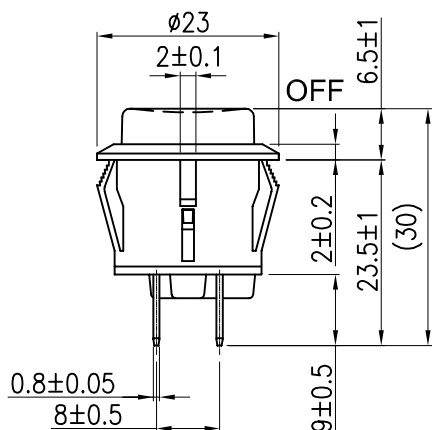

1、Tolerances Unless Otherwise Specified ± 0.3

Date	Name	Description						No.	
Drawn	Checked	Approved	SCI BOM No.	1830355	Model Name	PUSH SWITCH			
邱 權	Ruby	李元生	Customer No.		Model No.	SPR13-527AL-02	Rev.		
02/18/'11	03/17/'11	03/23/'11	Unit	mm	SWEETA PRODUCTS CORPORATION				0