





Rating	3A 125V AC 1A 250V AC		Mounting Hole	Circuit Diagram
Contact Resistance	50m ohm Max			
Insulation Resistance	DC 500V 100M ohm Min			
Dielectric Strength	AC 1500V 1 minute			
Switch Function	2P SPST OFF-(ON)			

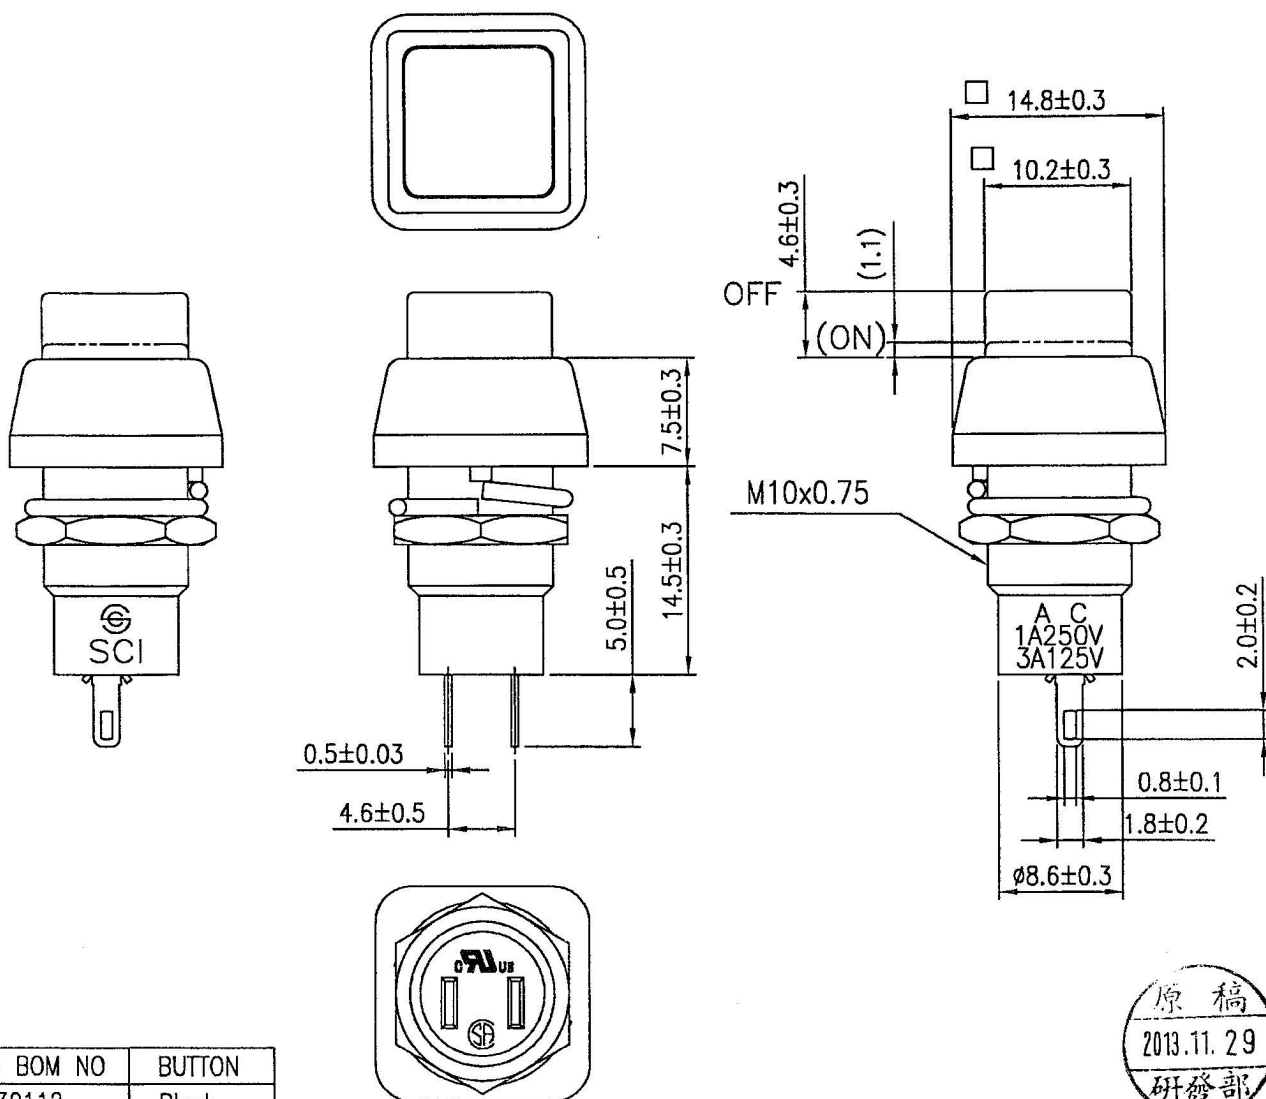

SCI BOM NO	BUTTON
1830112	Black
1830258	Red



11/12/13	Ruby	依品管清查安規, RU兩側須加標"C"與"US"				△
Date	Name	Description				No.
Drawn	Checked	Approved	SCI BOM No	See Table	Model Name	PUSH SWITCH
Ruby			Customer No		Model No.	SPR13-83A-05
11/12/13		11/14-13	Unit	mm	SWEETA PRODUCTS CORPORATION	
						Rev. 1