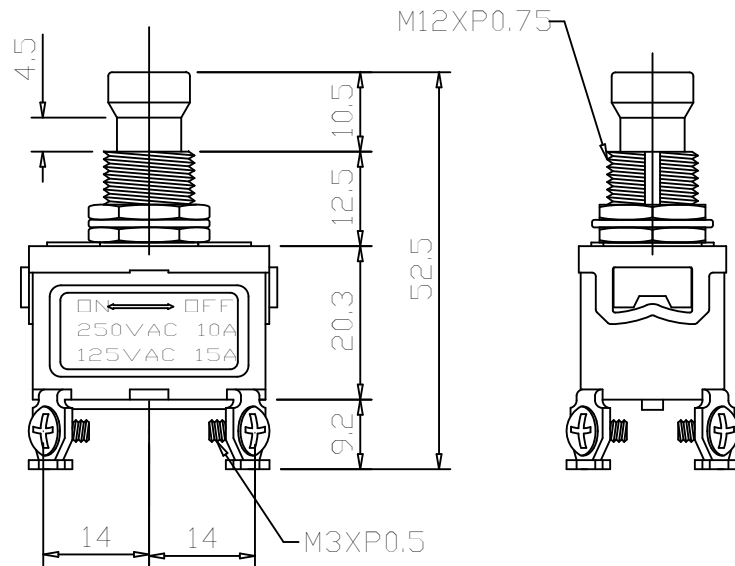
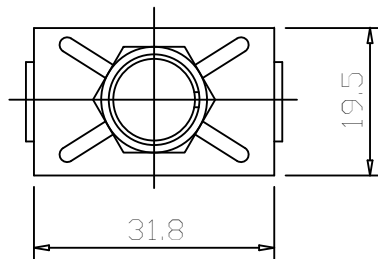


NO. POLES	MODEL NO.	SWITCH FUNCTION			TERMINAL QUANTITY	CONNECTED TERMINALS		
		POS.1	POS.1	POS.1		POS.1	POS.1	POS.1
DPST	PU705	ON	—	OFF	4P	1-3 4-6	—	—
DPST	PU705A	<ON>	—	OFF	4P	1-3 4-6	—	—
DPST	PU705B	ON	—	<OFF>	4P	1-3 4-6	—	—

MOM=MOMENTARY

SPECIFICATION

- 1.PATING:10A 250VAC,15A 125VAC
- 2.INSULATION RESISTANCE:DC 500V 200MΩ OR MORE
- 3.CONTACT RESISTANCE:DC 2-4V 1A 20MΩ OR LESS
- 4.WITHSTAND VOLTAGE:AC 1500V OR MORE

端子種類尺寸 Termination Options

H1	H2	H3	H4	H5

產品
PRODUCT

POWER TOGGLE SWITCH

喜威達企業股份有限公司

比例
SCALE

1:1

單位
UNIT

MM

公差
TOLERANCE

±0.3MM

SWEETA PRODUCTS CORPORATION