


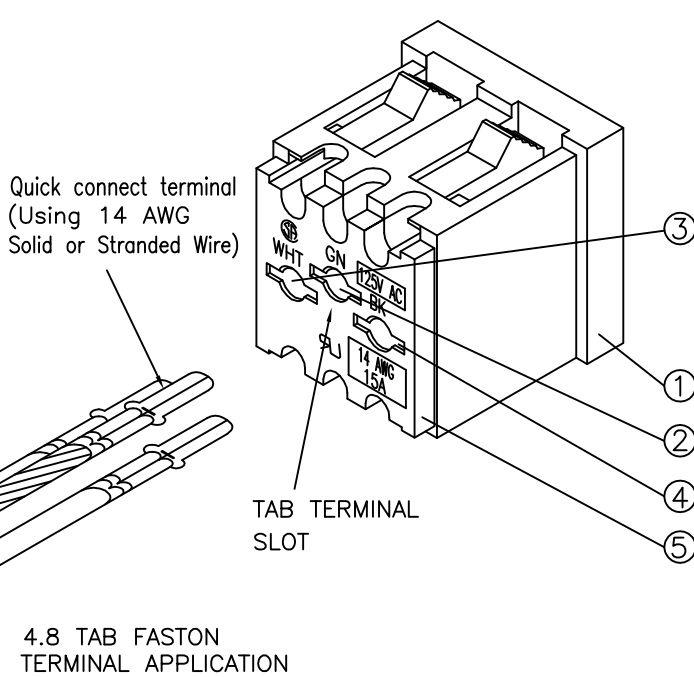


SWRF-6001



SCALE : 1:1

UNIT : mm

SINGLE SOCKET

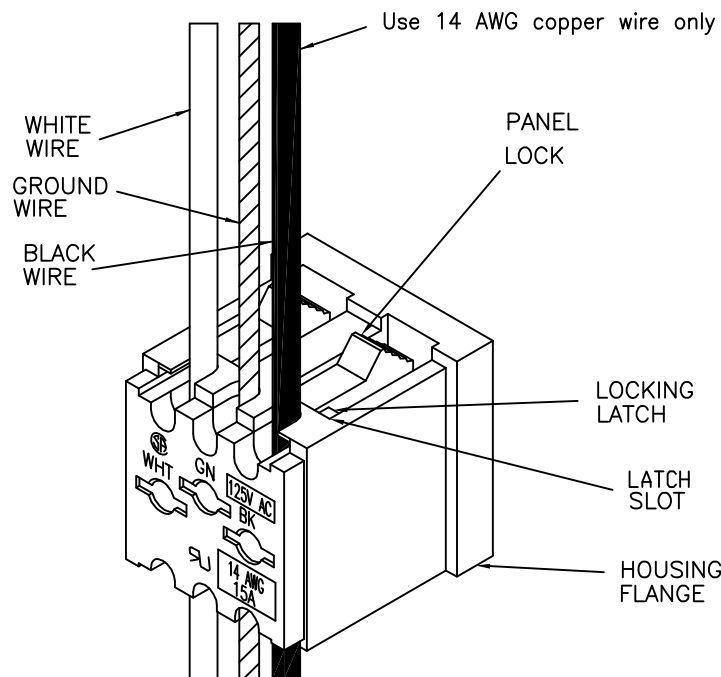

Part No.	Body Color	Cover Color
SWRF-6001	Black	Black
SWRF-6001-V0	Black 94V-0	Black 94V-0
SWRF-6001-B	Orange-Red	Black
SWRF-6001-B1	Yellow(115C)	Black
SWRF-6001-B2	Ashy	Black
SWRF-6001-B3	Iron-Grey	Black
SWRF-6001-B4	Yellow	Black
SWRF-6001-B5	Ivory-White	Black
SWRF-6001-B6	Ivory-White	Black
SWRF-6001-B7	Yellow(467C)	Black
SWRF-6001-B10	Red(7418C) △	Black
SWRF-6001-B11	Gray(430U)	Black
SWRF-6001-B12	Gray 1C	Black
SWRF-6001-B13	Charcoal(429C)	Black
SWRF-6001-B14	TL灰色 (56SM-252287)	Black
SWRF-6001-B15	WHITE	Black
SWRF-6001-B15-V0	WHITE 94V-0	Black 94V-0
SWRF-6001-B16	cool Gray 4C	Black
SWRF-6001-B17	cool Gray 9C	Black
SWRF-6001-B18	7528C	Black
SWRF-6001-B19	Orange(144C)	Black

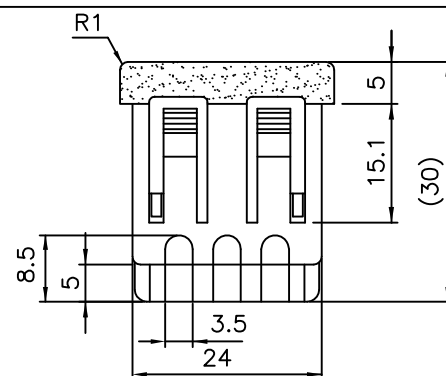

PANEL CUTOUT
THICKNESS 0.8~1.8 mm

NOTE: THIS ILLUSTRATION PERTAINS TO SOLID
WIRE APPLICATIONS ONLY

Rating : 15A 125V AC
Approvals : UL/CSA

5	Cover back of the Body, NYLON	1	DIMENSIONAL TOLERANCES	
4	Contact PIN Brass Strip t=0.4mm Cu-Plated	1	GRADATION	TOLERANCE
3	Contact PIN Brass Strip t=0.4mm Ni-Plated	1	X	±0.4
2	Contact PIN Brass Strip t=0.4mm Cu-Plated	1	X.X	±0.3
1	Body Insulator NYLON	1	X.XX	±0.1
APPROVED: 洪 100.11.22 銘福			X.XX	
CHECK: 蔡 100.11.22 伯林			ANGLE	
DRAWER: 謝 100.11.22 祺祥			±1°	
MIN 100.11.16				
MATERIAL NO: SWRF-6001 Series				
DRAWING NO: 800905				