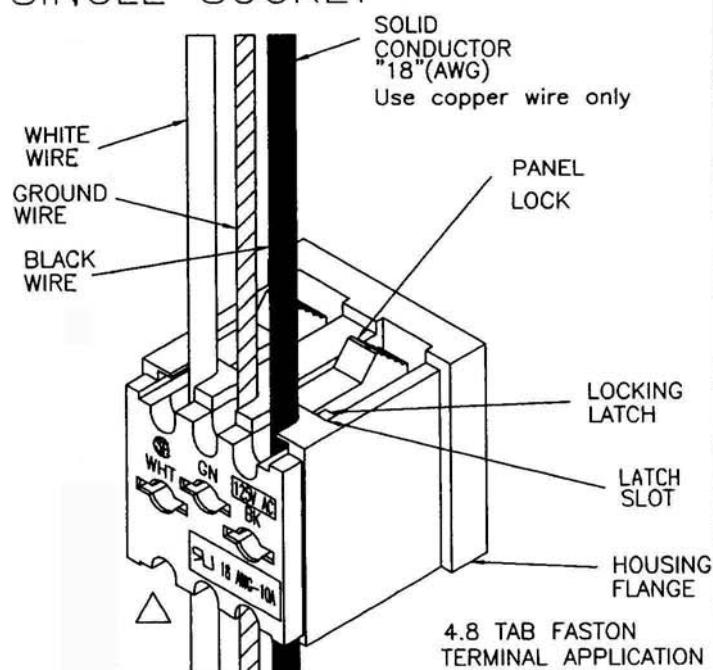

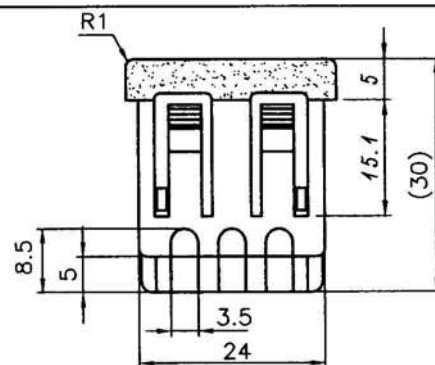



SWRF-6002

SCALE : 1:1


UNIT : mm

SINGLE SOCKET

TAB TERMINAL
(Using Solid or
Stranded Wire)TAB TERMINAL
SLOT

Part No.	Color
SWRF-6002	黑
SWRF-6002-A	灰
SWRF-6002-A2	灰白(211325)

PANEL CUTOUT
THICKNESS 0.8~1.8 mm



NOTE: THIS ILLUSTRATION PERTAINS TO SOLID
WIRE APPLICATIONS ONLY

Rating : 10A 125V AC
Approvals : UL/CSA

5	Cover back of the Body, NYLON Black Color	1	DIMENSIONAL TOLERANCES	
4	Contact PIN Brass Strip t=0.4mm Cu-Plated	1	GRADATION	TOLERANCE
3	Contact PIN Brass Strip t=0.4mm Ni-Plated	1		
2	Contact PIN Brass Strip t=0.4mm Cu-Plated	1	X	±0.4
1	Body Insulator NYLON	1	X.X	±0.3
APPROVED:  97.3.11 CHECK:  97.3.11 DRAWER: ANN  97.3.11			X.XX	±0.1
			DRAWING NO: 880104	ANGLE ±1°

NO: TWI-K-1567(I)