



- 1、All dimensions in mm [Inch]
- 2、General tolerance : $>10\pm0.4$
 $<10\pm0.25$
- 3、Electrical rating : 16A 250VAC & 21A 125VAC (UL)
16(6)A 250VA(VDE)
- 4、Contact resistance : $<20\text{m}\Omega$ (initial)
- 5、Insulation resistance : $>1000\text{M}\Omega$ (500VDC between open contacts)
- 6、Dielectric strength : $>1500\text{V}$ 1 minute
- 7、Mechanical life : >30000 cycles
- 8、Electrical life : >10000 cycles
- 9、Temperature rise at the terminal : Max.30℃
- 10、Solder ability of terminal : Max350℃, 3S(no pressure may be placed in the terminals when soldering by hand)
- 11、Any Cd Pb Hg etc and it's compounds is not include in this product
- 12、Ambient temperature : T85/55
- 13、Ambient humidity: Max.85%
- 14、Degree of protection : IP20
- 15、Applicability for appliance of class : class II
- 16、Proof tracking resistance index(PTI) : 175
- 17、Degree of pollution : normal

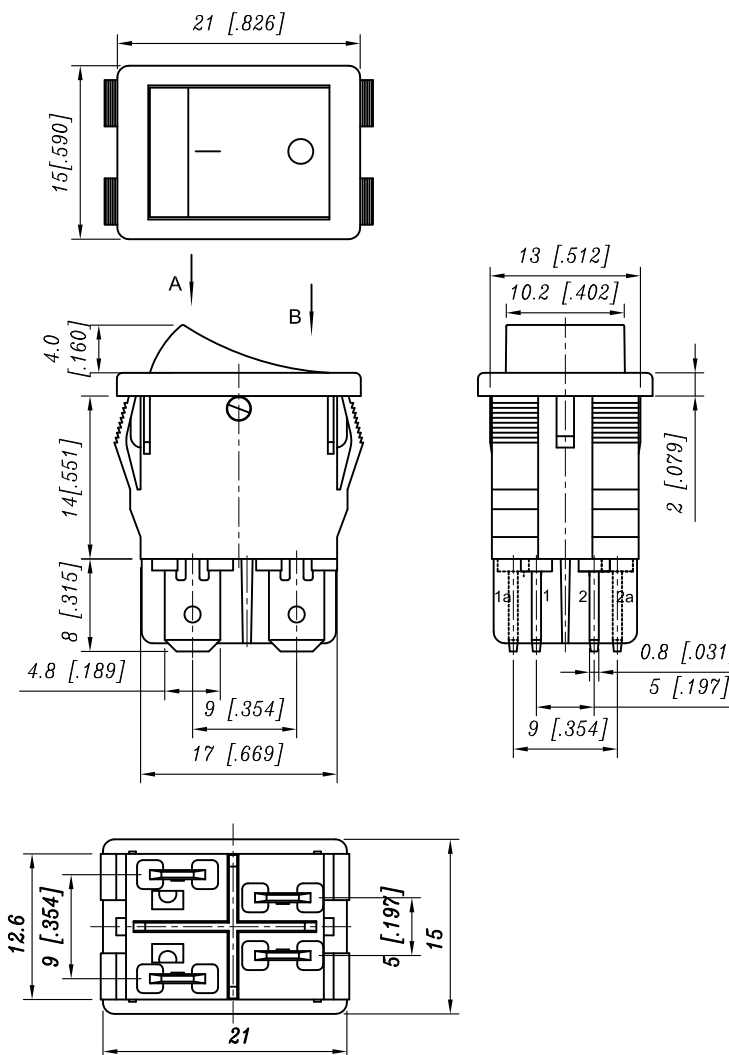


Color	Housing	Actuator
K(Black)	✓	✓
W(White)		
R(Red)		
G(Gray)		
O(Orange)		
B(Blue)		
Y(III. Yellow)		
M(III. Green)		
F(III. Blue)		
T(III. White)		
D(III. Red)		

POLE FUNCTION	OPTIONS OF FUNCTION		
	A	—	B
DPST	1-1a 2-2a	—	OFF



PANEL CUT-OUT		
Z	Y	X
0.7~1.25 [.028~.049]	12.90~13.10 [.508~.515]	19.1~19.2 [.752~.756]
1.25~2.0 [.049~.079]	12.90~13.10 [.508~.515]	19.3~19.4 [.760~.764]
2.0~3.0 [.079~.118]	12.90~13.10 [.508~.515]	19.4~19.6 [.764~.772]
3.0~4.0 [.118~.157]	12.90~13.10 [.508~.515]	19.6~19.8 [.772~.780]



A	B	C	D	E	F	G	H	I
					✓			

Part NO.	SR9D8KKFT00F10	喜威達企業股份有限公司 SWEETA PRODUCTS CORPORATION					
Dwg. NO.	R9D8-110616						
Series NO.	R19	Drawing	lizhili		Auditing	wangchangjia	
Dwg.Name	Specification	Scale	2:1	Date	06/16/11	Page	

* We keep the right to alter the dimension without notice.