


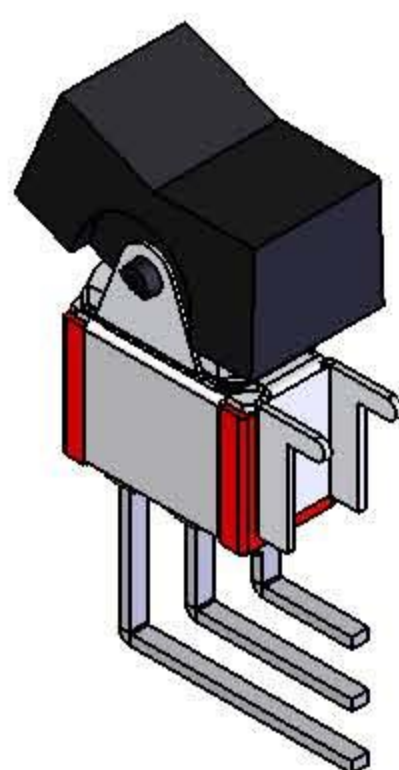
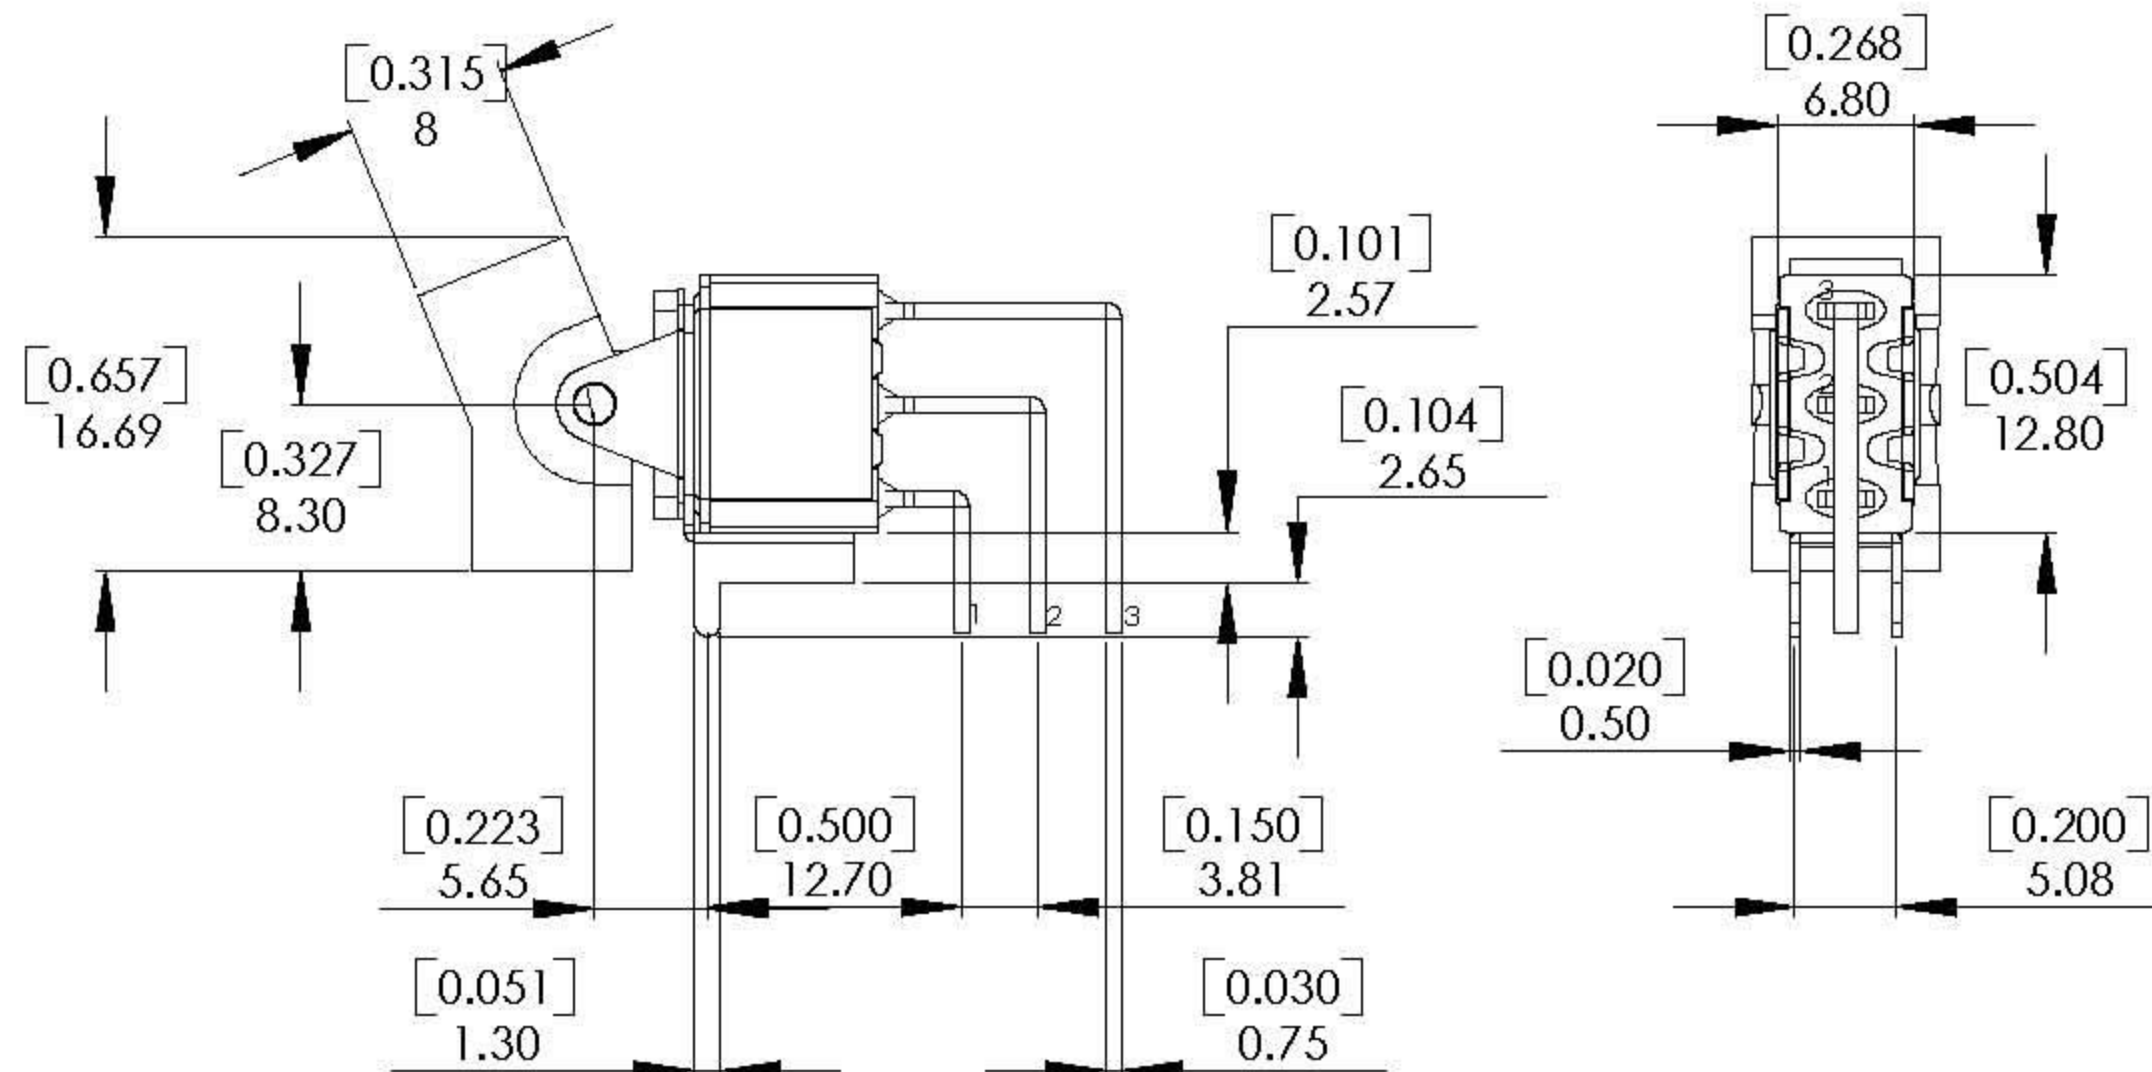


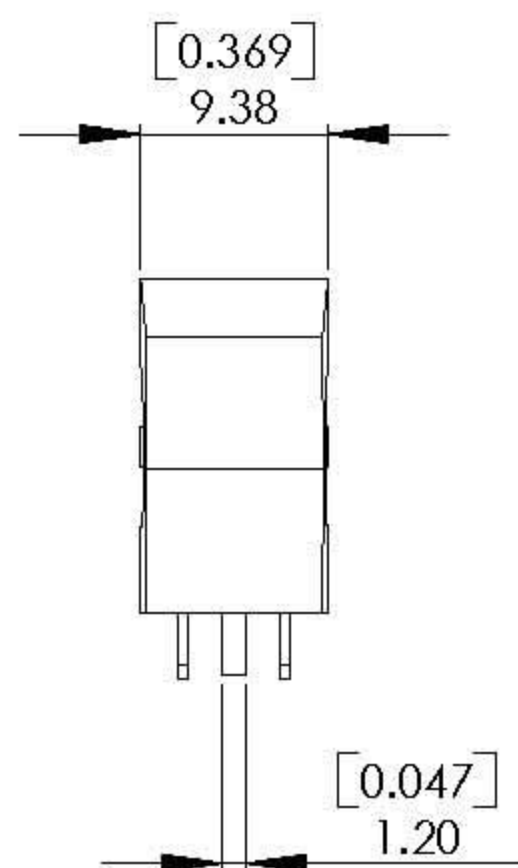

P.C. MOUNTING

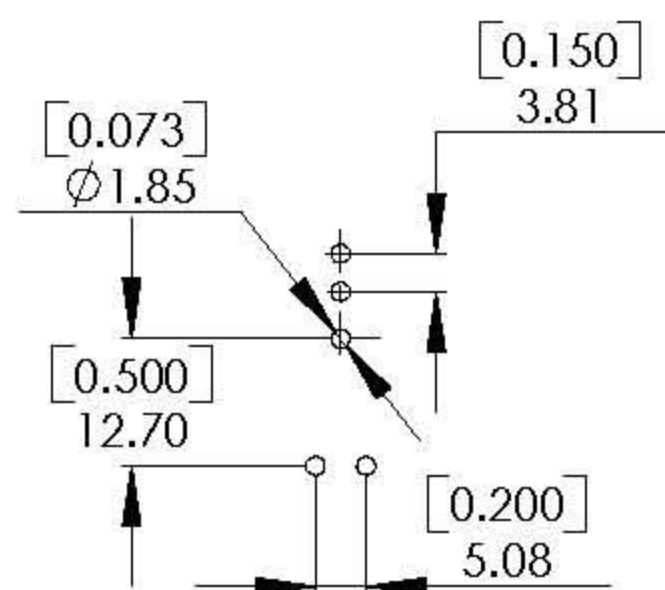

Schematic

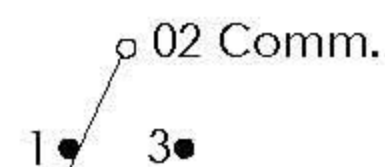

Model No.	Switching Position		
	ON	NONE	ON
RL1-1	ON	NONE	ON
RL1-2	ON	NONE	(ON)
RL1-3	ON	OFF	ON
RL1-4	(ON)	OFF	(ON)
RL1-5	ON	OFF	(ON)
Term Comm.	2-3	OPEN	2-1

SPECIFICATIONS:

CONTACT RATING : 5 AMPS @ 120 V AC or 28 V DC.
 2 AMPS @ 250 V AC or 0.4VA AMPS @ 20 V AC or DC.
 ELECTRICAL LIFE : 50,000 make-and-break cycles at full load.
 CONTACT RESISTANCE : 10 mΩ max. initial @ 2-4 V DC.
 100 mA, for both silver and gold plated contacts.
 INSULATION RESISTANCE : 1,000 MΩ min.
 DIELECTRIC STRENGTH : 1,000 V RMS @ sea level.
 OPERATING TEMPERATURE : -30 °C to 130 °C

MATERIALS:

CASE : Diallyl phthalate (DAP)(UL-94V-0).
 ACTUATOR : Nylon, black standard.
 BUSHING : Brass, nickel plated.
 HOUSING : Stainless steel.
 TERMINAL/CONTACT : Brass, with silver or gold plated.
 or gold over silver.
 SWITCH SUPPORT : Brass, tin plated.

喜威達企業股份有限公司
 SWEETA PRODUCTS CORPORATION
 TEL:886-2-2226-8001, FAX:886-2-2226-8002
 23552 台北縣中和市中正路799號1樓
<http://www.sweeta.com>
 E-mail:sweeta.tw@msa.hinet.net

TOLERANCE

XX. ± 0.5

X. ± 0.2

.X ± 0.2

.XX ± 0.2

ITEM NO	RL1-xR1	DATA	
CHECKED BY		DRAWN BY	