

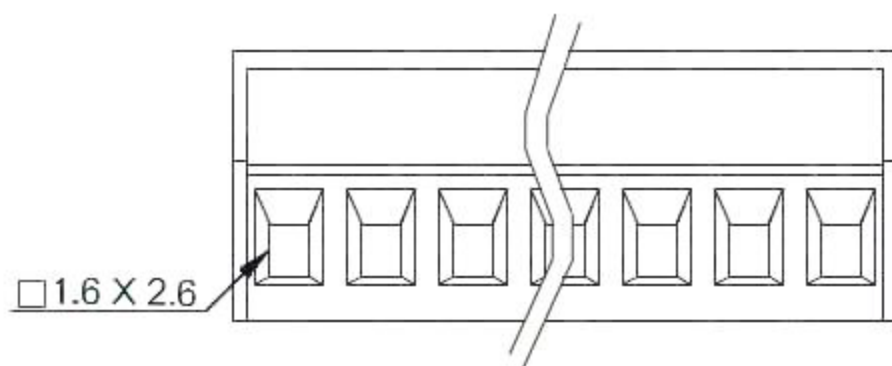
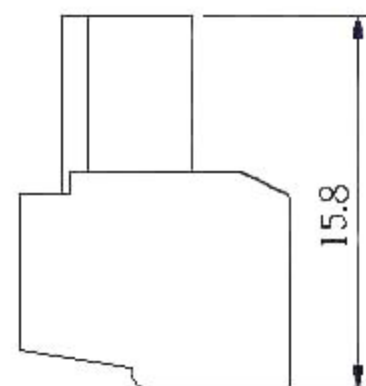
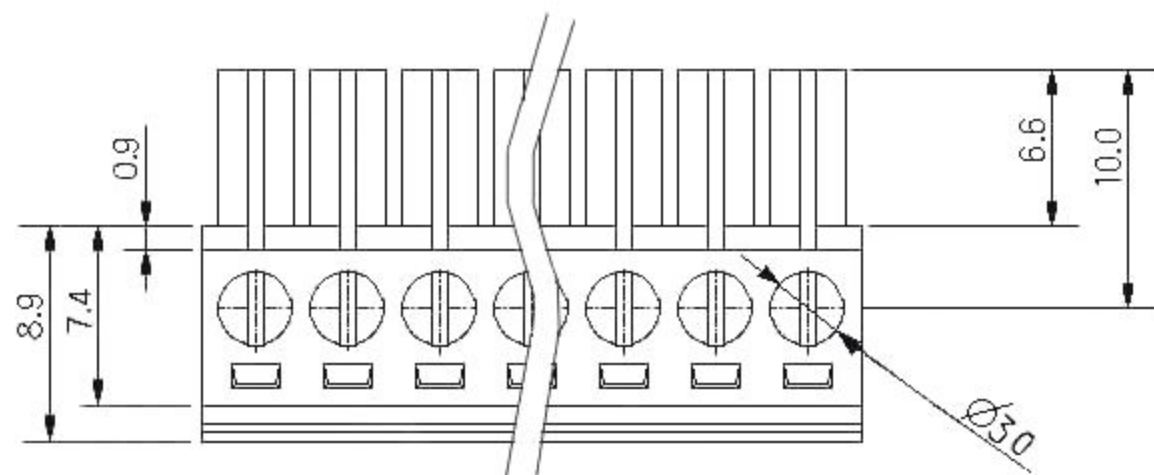


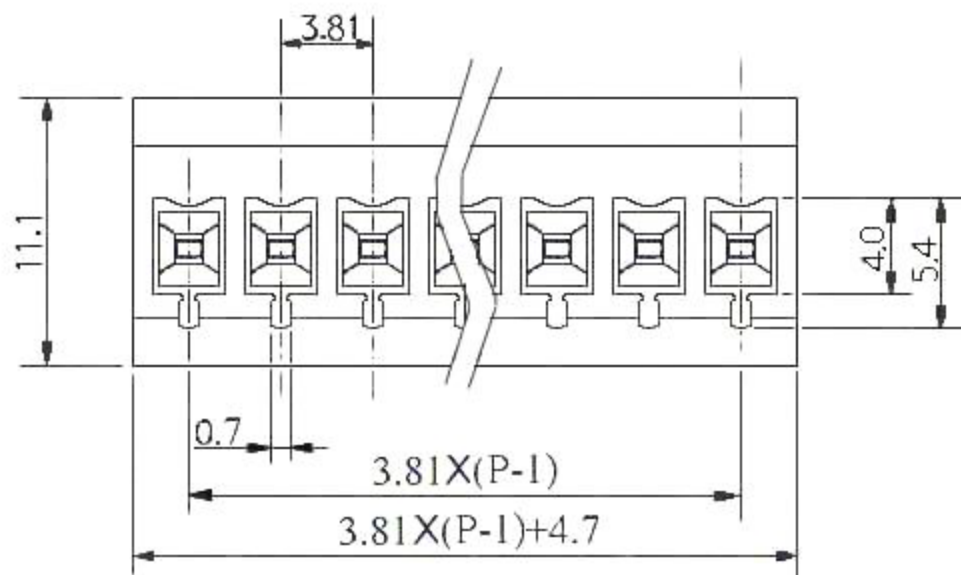

修改记录(REVISION RECORD)				
序号(SEQ.)	版本(REV.)	日期(DATE)	绘图(DRAWING)	修改说明(DESCRIPTION)

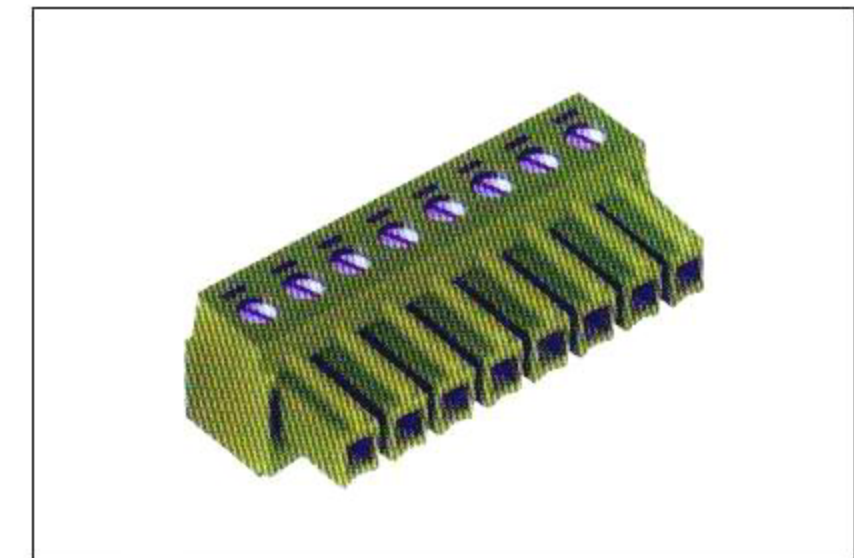

Specifications

Poles : 2P ~ 16P

Contact : Phosphor Bronze, 0.3t, Nickel Plated.

Cage clamp : Brass, Nickel Plated.

Screw : M2.0, Steel, Zine Plated.

Screw Torque Value : 3 kg/cm

Housing Material : Polyamide 66, Green

Insul. Withstands Voltage : AC2000V/min

Insul. Resistance: 500 MΩ or More at DC 500V

Using Temperature Range: -40°C ~ +105°C

UNIT 單位	SCALE 比例	喜威達企業股份有限公司 SWEETA PRODUCTS CORPORATION		
MM		TITLE STGGC-3 81-K_P		
TOLERANCE 公差		MATL 材料	PART NO 料號	
X.X±		FINISH 處理	REV 版次	
X.XX±		DESIGN 設計	DRAW NO 圖號	
ANGLE 角度		APPR 核准	A	