

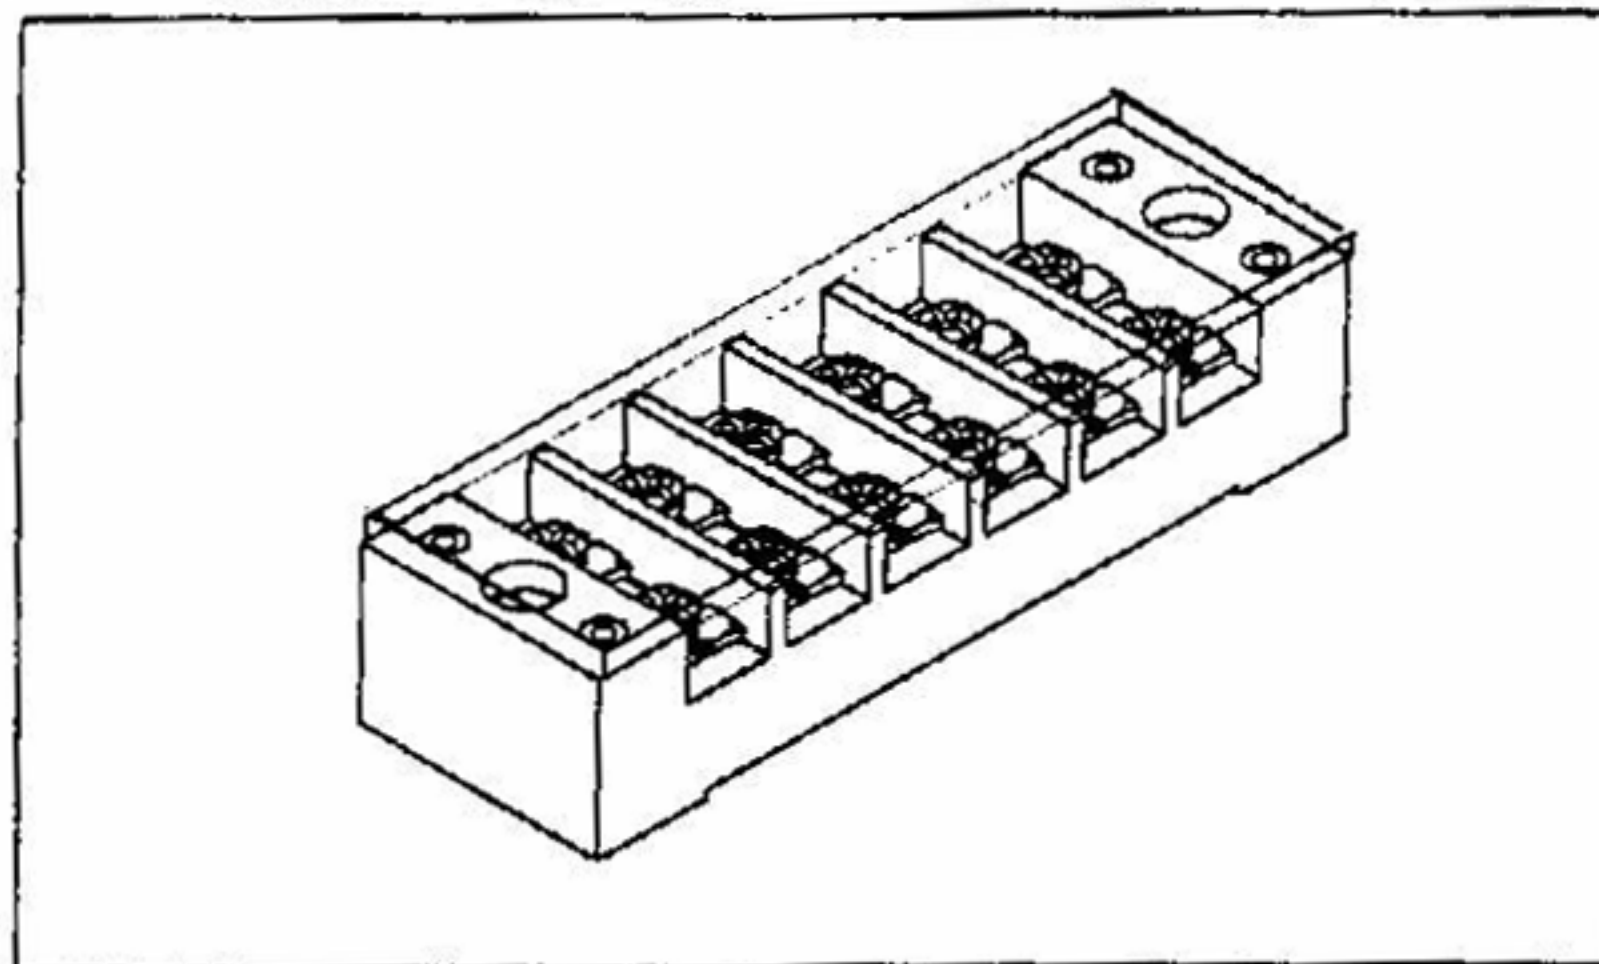


ITEM NO. STGGD-40-25A SERIES PITCH 12mm

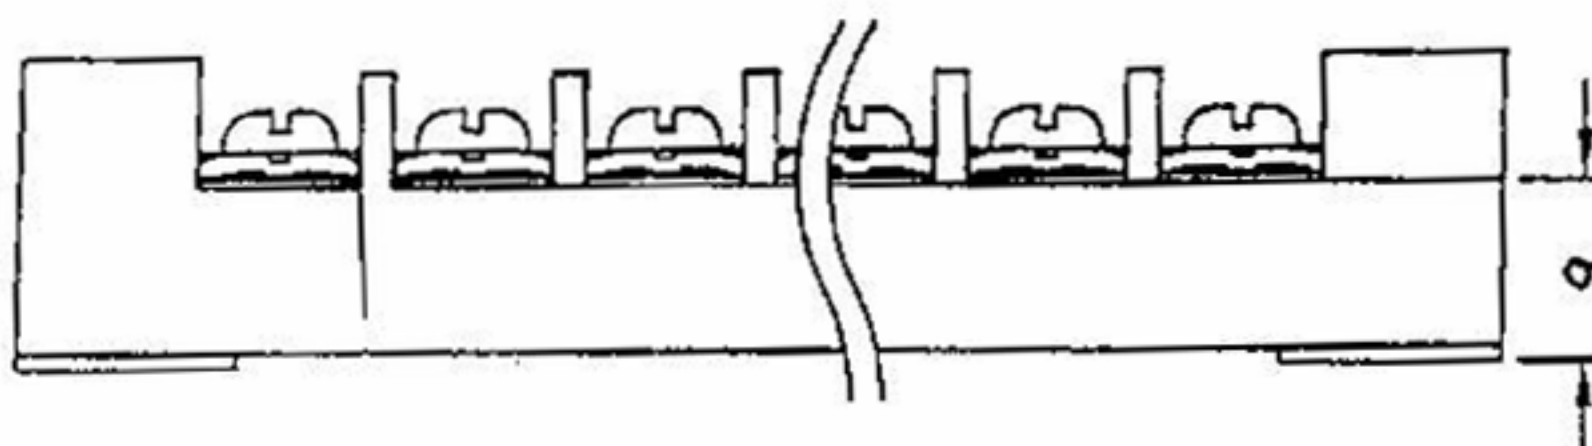

STGGD-40-25A

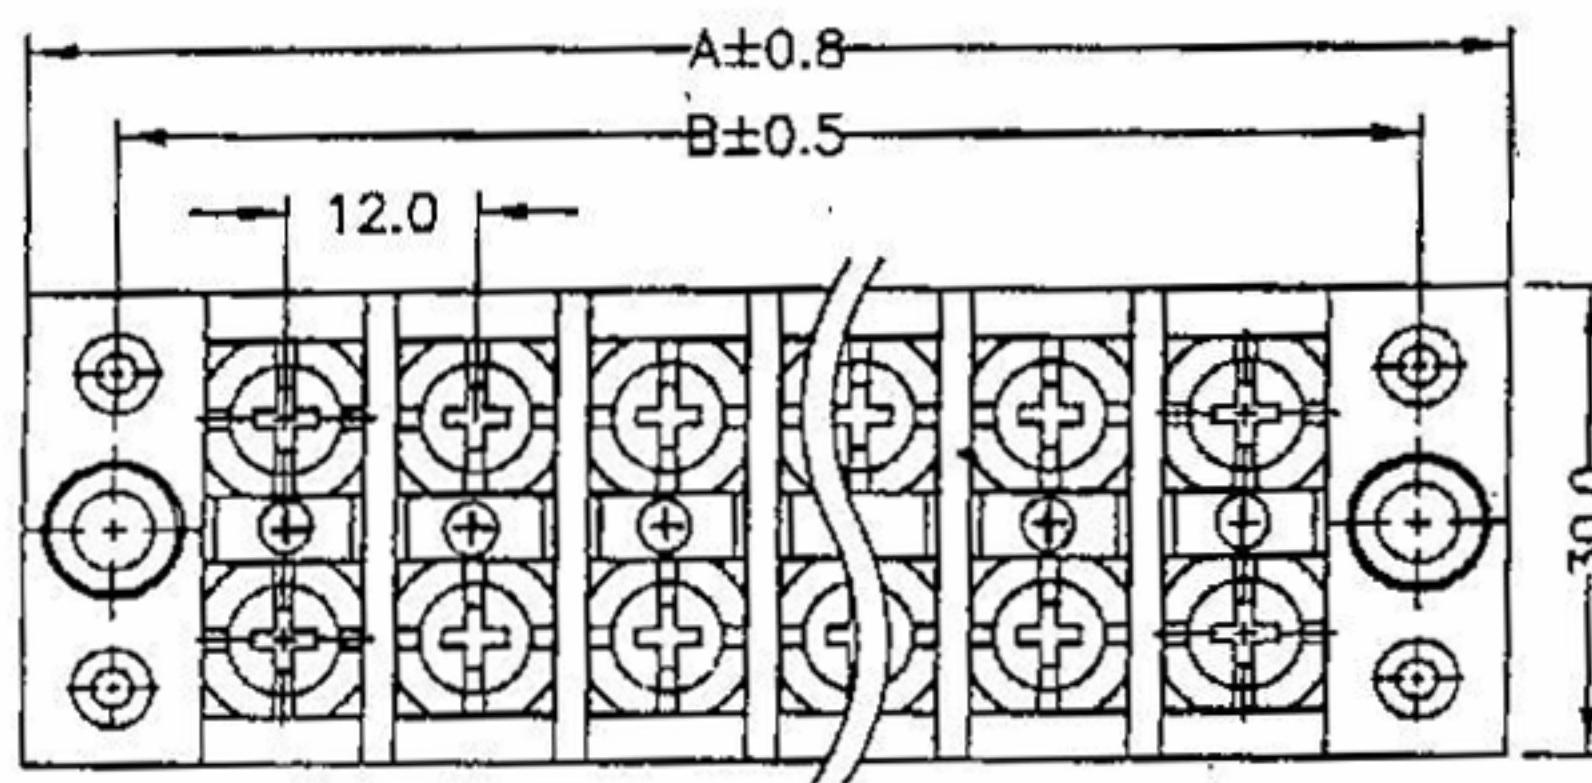

	DIMENSION:mm PITCH 12mm			
POLE	3	4	6	12
A±0.8	55.5	68	92	164
B±0.5	45	57	81	152

SPECIFICATIONS

Rated:	25A /600VAC
Insulation Withstands Voltage:	AC 2000V/min
Insulation Resistance:	1000MΩ or More at DC500V
Using Temperature Range:	-40°C~+120°C
Screw Torque Value:	20 Kg-cm
Wire Range Awg:	12 - 22 STR
Insulator Body:	Plastic P.C (UL 94V-0)
Terminals:	Brass, Chromium Plated 0.8t
Terminal Screws:	M4 Yellow Zinc Plated