


	PARTS NAME	MATERIAL	UL FLAME GRADE
1	Sensing cap	Aluminum	
2	Actuating pin	Ceramic	
3	Bimetal disc	Bimetal	
4	Retainer	PPS	94V-0
5	Contact-F	Silver alloy	
6	Contact-R	Silver alloy	
7	Rivet	Copper	
8	Terminal	Brass tin plated	
9	Case	PPS	94V-0
10	Movable arm	Beryllium copper	
11	Stationary arm	Brass	
12	Tube	Bronze	


SPECIFICATIONS

- * CONTACT TYPE : Normally Closed
- * ACTION TEMP : 120 ° C ± 5 °C
- * RESET TEMP :105 ° C ± 8 °C
- * TERMINAL SIZE : Amp #250 TAB
- * CIRCUIT RESISTANCE : 50mΩ MAX.
- * INSULATION RESISTANCE : 100MΩ min. at DC 500V
- * DIELECTRIC STRENGTH : AC 1500V For One Minute
Or AC 1800V For One Sec
- *APPROVALS AND OPERATING LIFE :
 - UL CUL:100,000 Cycles :15A 125VAC/10A 250VAC
 - ENEC17:100,000 Cycles :15A 125VAC/10A 250VAC
 - 10,000 Cycles :16A 250VAC
 - CQC:10,000 Cycles :16A 250VAC

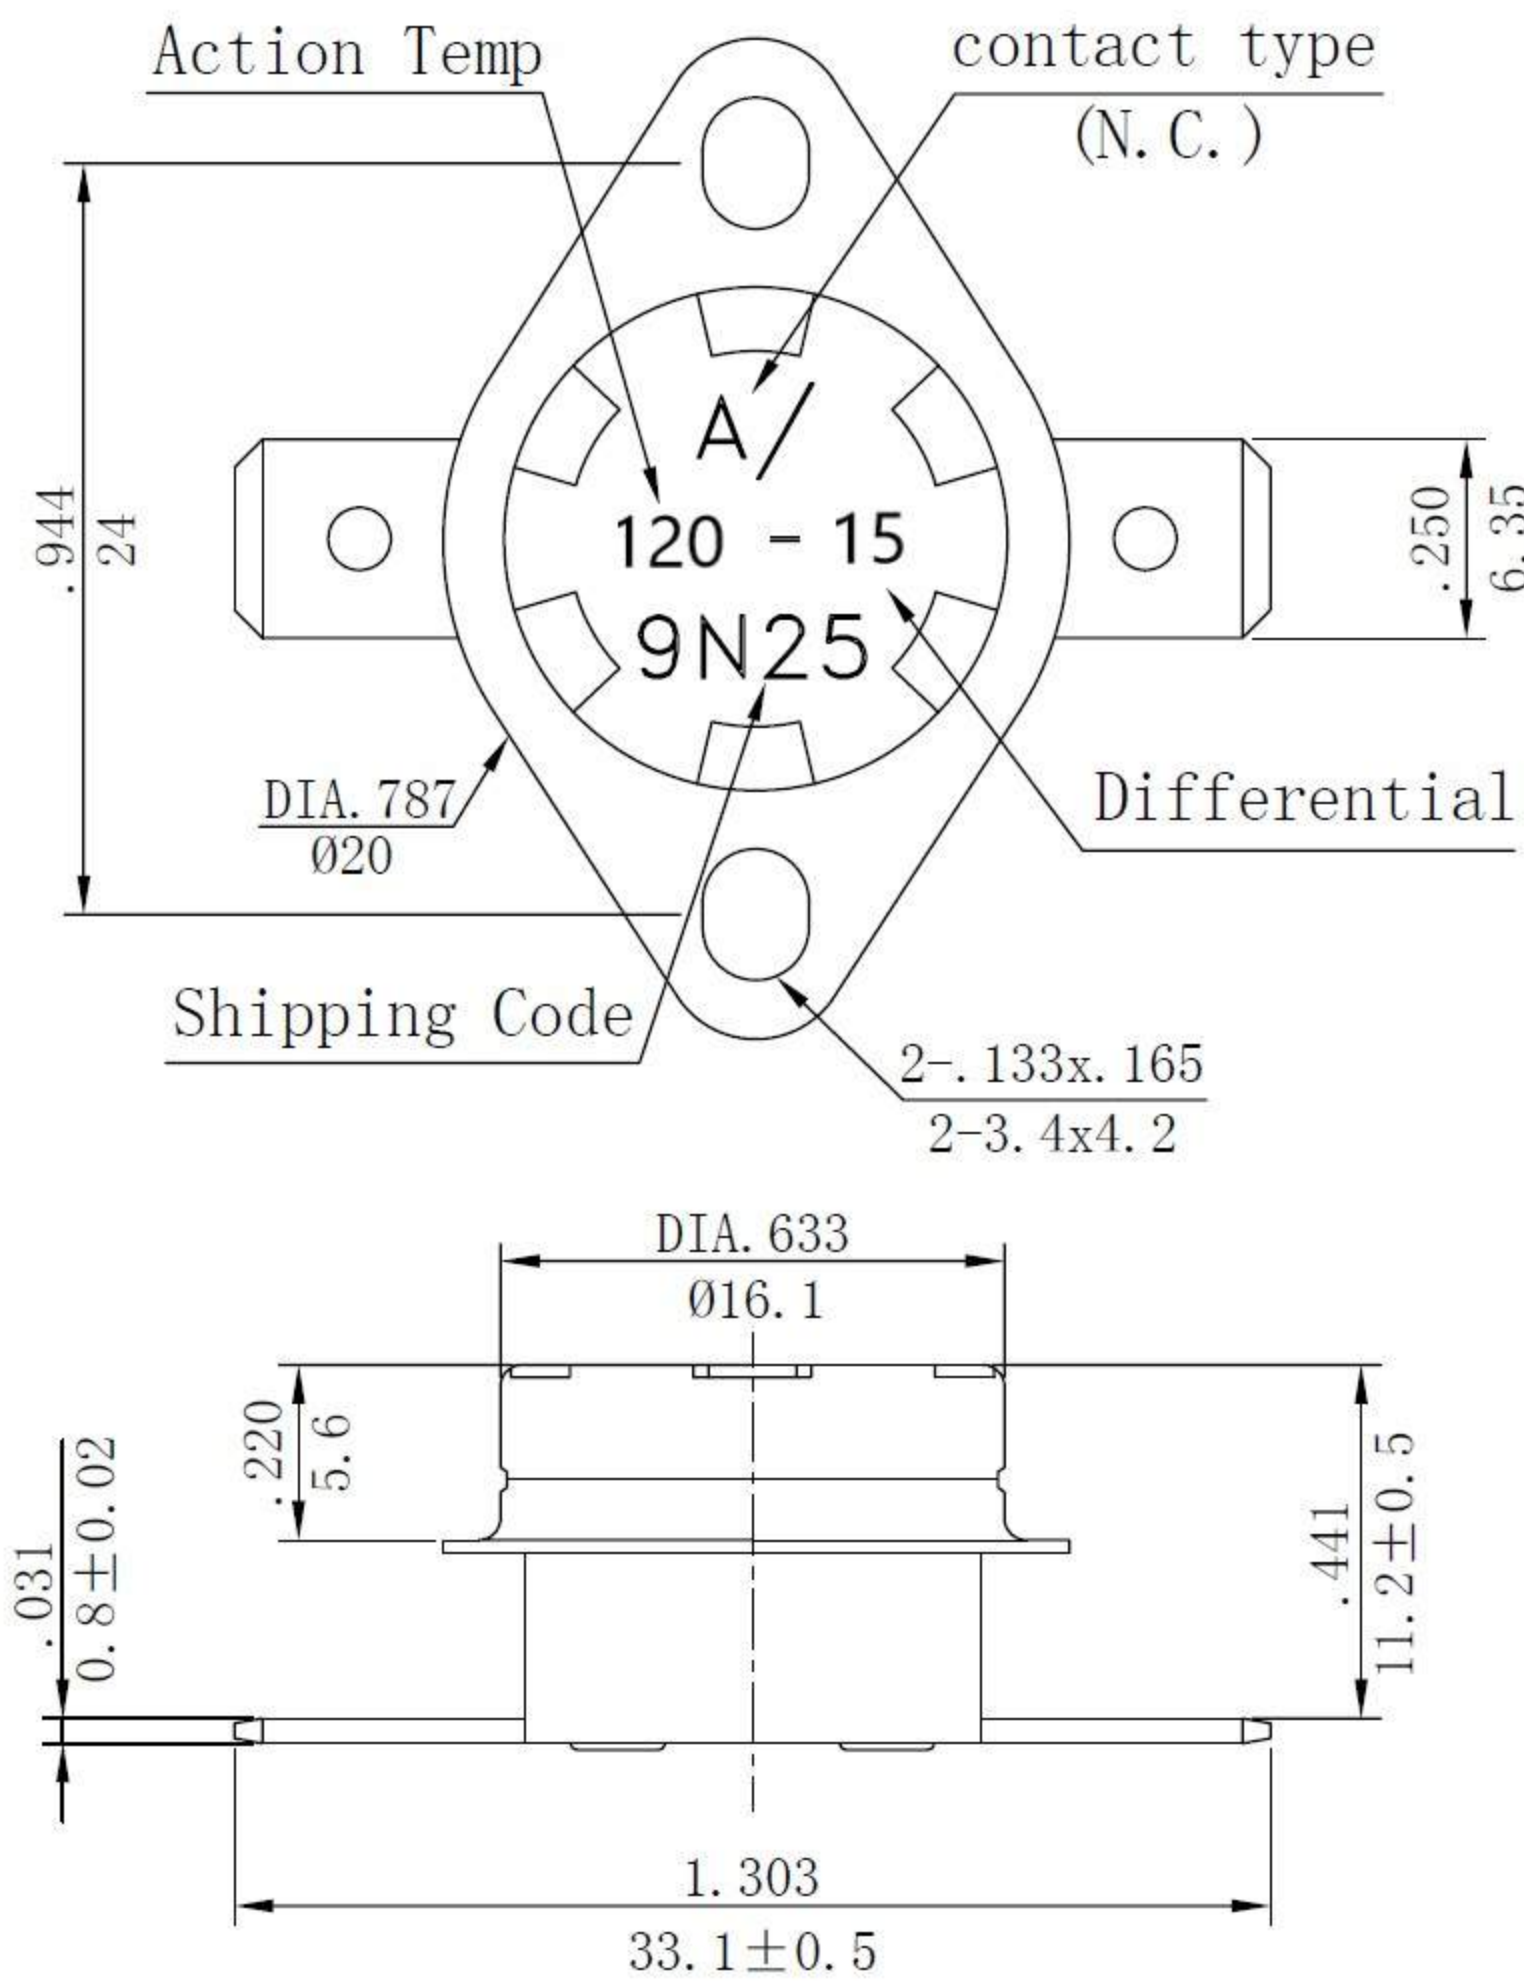

9 N 25
25th
November Month
2009 Year

Shipping Code

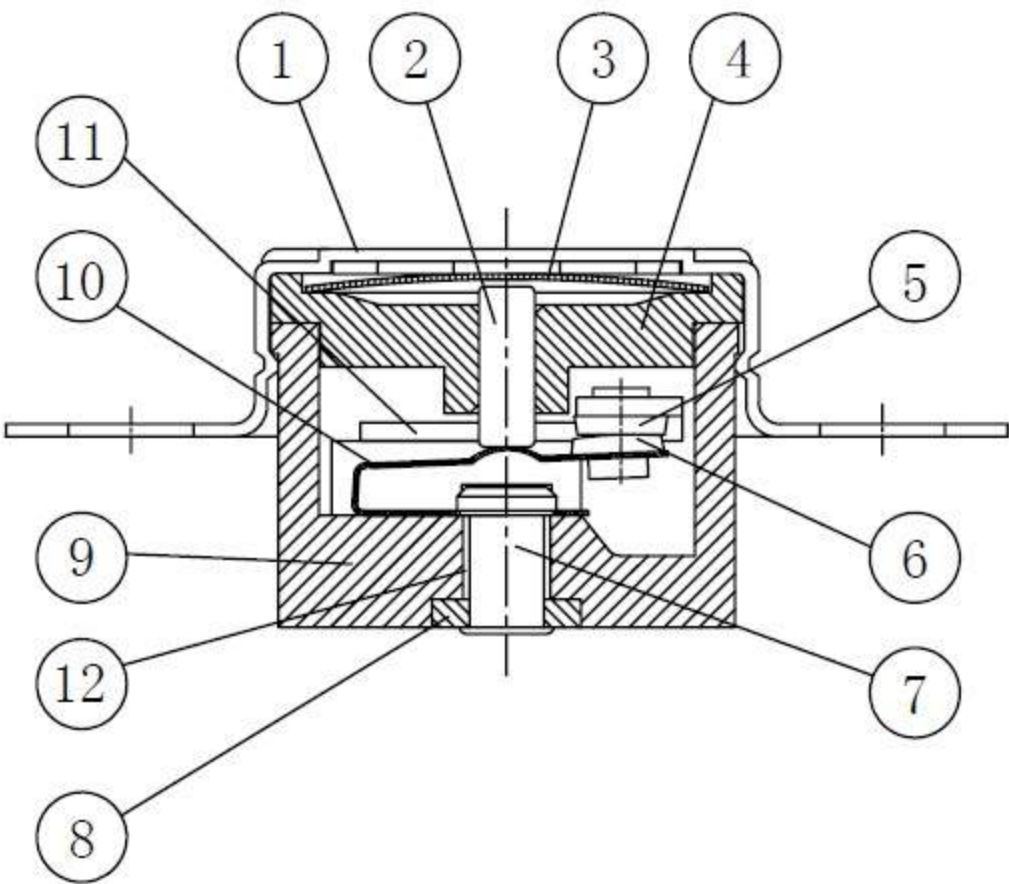

INCH
MM

Scale 2:1 (mm)

		Series	SWT24	Code	SWT24A120BBF2-15	
		Unit	mm	Customer		
		draft	check	sale	approve	
Description	Draft	Yang				

喜威達企業股份有限公司
SWEETA PRODUCTS CORPORATION