

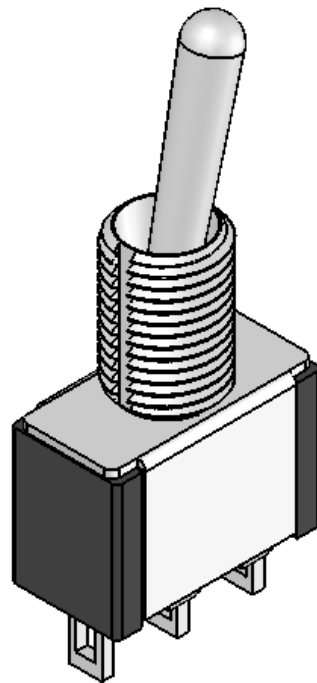


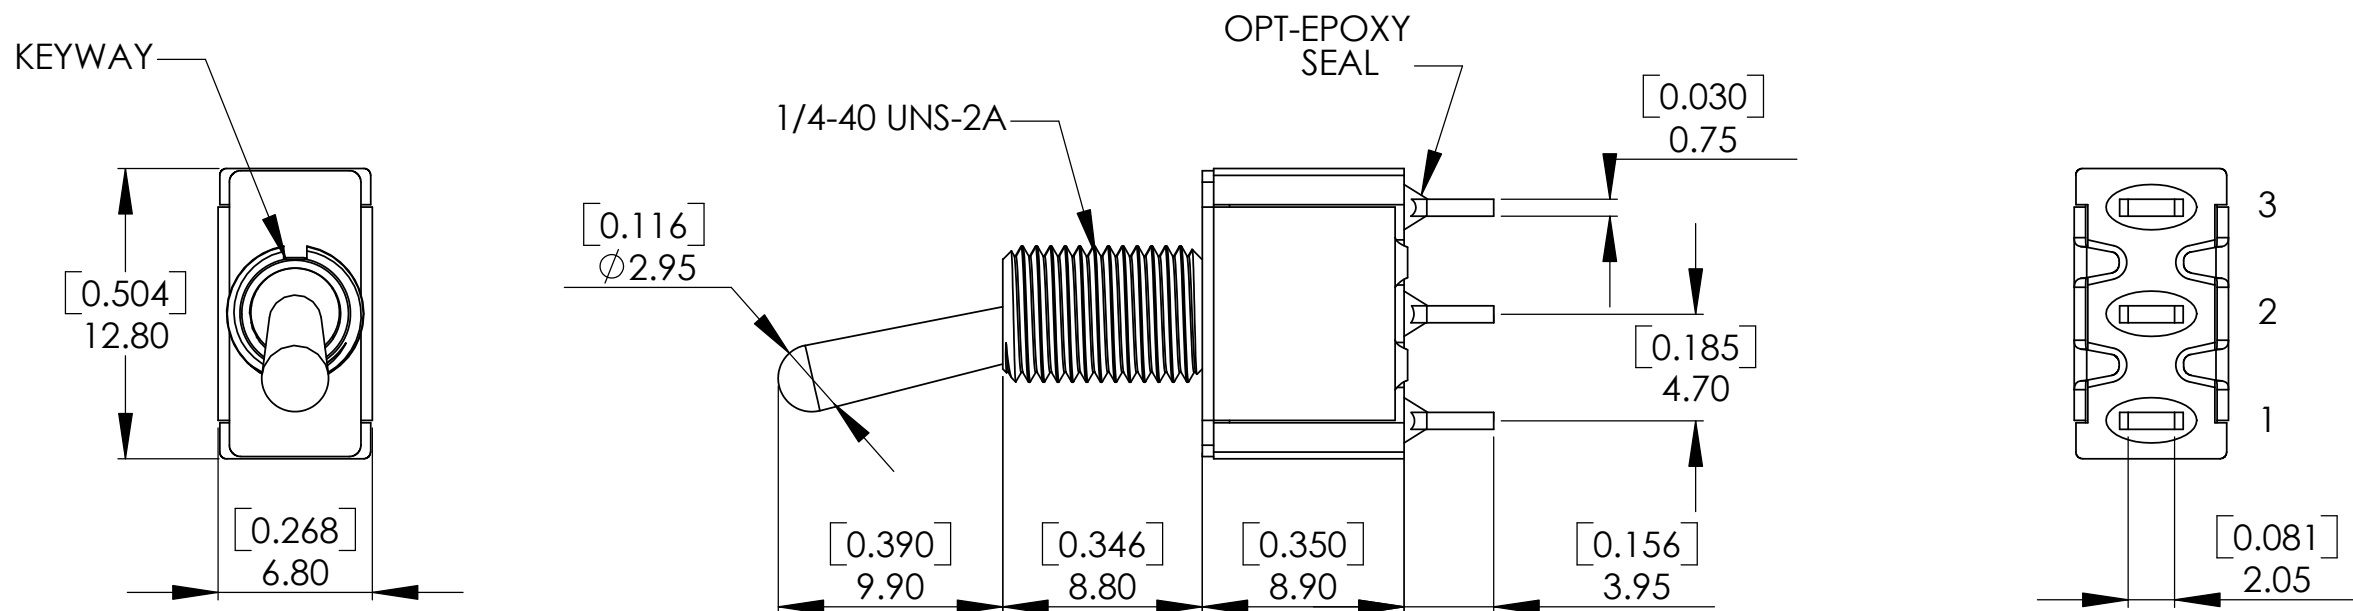

Schematic



Model No.	Switching Position		
	ON	NONE	ON
ST101	ON	NONE	ON
ST102	ON	NONE	(ON)
ST103	ON	OFF	ON
ST104	(ON)	OFF	(ON)
ST105	ON	OFF	(ON)
Term Comm.	2-3	OPEN	2-1

SPECIFICATIONS:

CONTACT RATING : 5 AMPS @ 120 V AC or 28 V DC.
 2 AMPS @ 250 V AC or 0.4VA AMPS @20 V AC or DC.
 ELECTRICAL LIFE : 6,000 make-and-break cycles at full load.
 CONTACT RESISTANCE : 10 mΩ max. initial @ 2-4 V DC.
 100 mA, for both silver and gold plated contacts.
 INSULATION RESISTANCE : 1,000 MΩ min.
 DIELECTRIC STRENGTH : 1,000 V RMS @ sea level.
 OPERATING TEMPERATURE : -30 °C to 130 °C

MATERIALS:

CASE : Diallyl phthalate (DAP)(UL-94V-0).
 ACTUATOR : ZINC ALLOY.
 BUSHING : ZINC ALLOY.
 HOUSING : Stainless steel.
 TERMINAL/CONTACT : Brass, with silver or gold plated.
 or gold over silver.
 SWITCH SUPPORT : Brass, tin plated.

喜威達企業股份有限公司
 SWEETA PRODUCTS CORPORATION

TOLERANCE

XX. ± 0.5

X. ± 0.2

ITEM NO		DATA		.X ± 0.2
CHECKED BY		DRAWN BY		.XX ± 0.2