





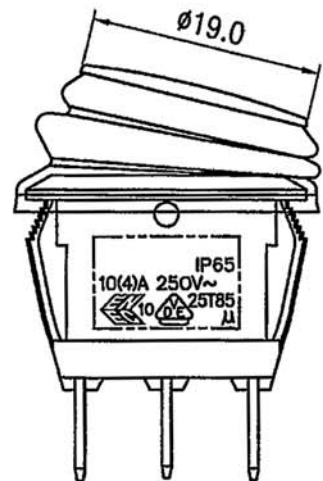


Rating	10(4)A 125/250VAC 20A 14VDC, 10A 28VDC	  	Mounting Hole  Thickness: 1.5~2.5 mm	
	16A 125VAC, 10A 250VAC			
	10(4)A 250V~			
Contact Resistance	50m ohm Max.		 Thickness: 0.7~2.5 mm	
Insulation Resistance	DC 500V 100M ohm Min.			
Dielectric Strength	AC 1500V 1 minute			
Operation Temperature	-25°C~85°C		Circuit Diagram 	
Switch Function	3P SPST ON-OFF (NEON dependent)			


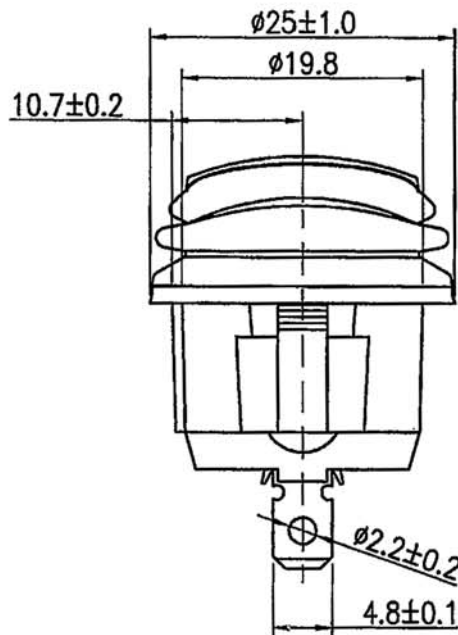


***MATERIAL:**

Frame: Nylon 66, Black
 Actuator: PC, Red clear
 Waterproof rubber: Silicone, Black
 Terminals: Silver plated, Copper alloy
 Hot Stamping: None
 Waterproof: IP65

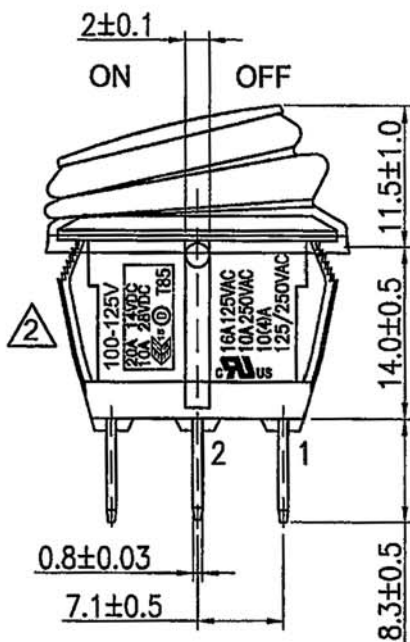

Tolerances ± 0.3 Unless Otherwise Specified

03/21/18	曾敏捷	通過UL61058/Demko, 追加刻字10(4)A125/250VAC, 20A14VDC, 10A28VDC			△	
09/17/14	曹盈芳	本體刻字更新, 重新出圖			△	
Date	Name	Description			No.	
Drawn	Checked	Approved	SCI BOM No.	1823922	Model Name	ROCKER SWITCH
曾敏捷			Customer No.		Model No.	SR13-112B8-02
03/21/18			Unit	mm	SWEETA PRODUCTS CORPORATION	
						Rev. 2