



Rating	20A 125VAC	Mounting Hole  <table><tr><th>Thickness(mm)</th><th>X(mm)</th><th>Y(mm)</th></tr><tr><td>0.75~1.25</td><td rowspan="3">21.0^{+0.3}₋₀</td><td>36.6±0.1</td></tr><tr><td>1.25~2.0</td><td>36.8±0.1</td></tr><tr><td>2.0~3.0</td><td>37.0±0.1</td></tr></table>	Thickness(mm)	X(mm)	Y(mm)	0.75~1.25	21.0 ^{+0.3} ₋₀	36.6±0.1	1.25~2.0	36.8±0.1	2.0~3.0	37.0±0.1	Circuit Diagram  R1/R2=30Kohm/2010 LED1=PLCC/SMD Green LED2=PLCC/SMD Red
Thickness(mm)	X(mm)		Y(mm)										
0.75~1.25	21.0 ^{+0.3} ₋₀		36.6±0.1										
1.25~2.0			36.8±0.1										
2.0~3.0			37.0±0.1										
Contact Resistance	50m ohm Max.												
Insulation Resistance	DC 500V 100M ohm Min.												
Dielectric Strength	AC 1500V 1 minute												
Operation Temperature	-40°~+85°												
Switch Function	4P SPDT ON-OFF-ON (LED dependent)												

Materials:

Frame: Nylon-66(94V-2), Black.

Actuator: Nylon-66+33%GF, Black.

Lens 1: PC, Green clear.

Lens 2: PC, Red clear.


Led 1: Green.

Led 2: Red.





Terminals A2, A3, A4: Silver plated copper.

Terminal B5: Brass.

*Sealed: IP67 when base fill epoxy.

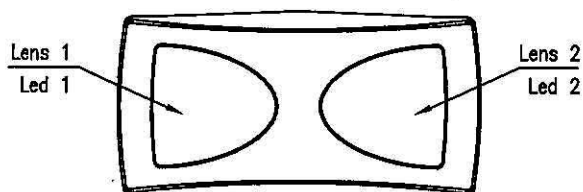

ON OFF ON

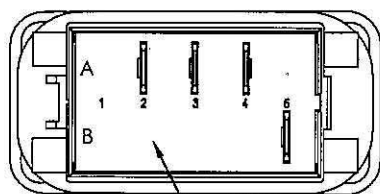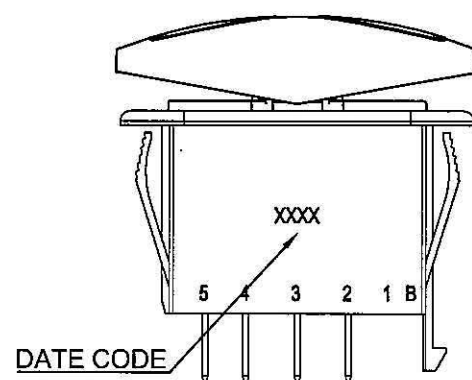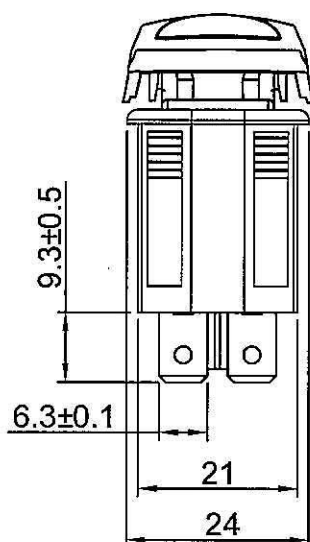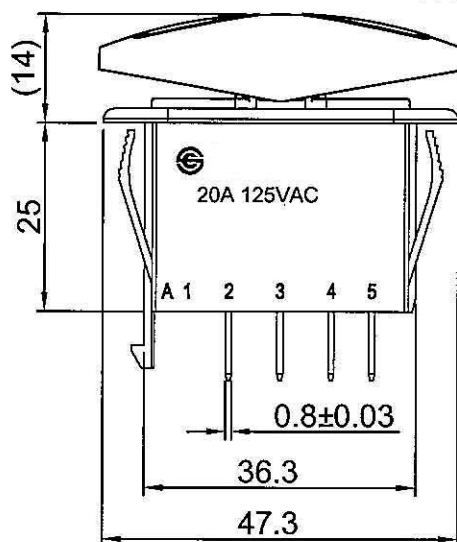

EPOXY ON BASE

Tolerances Unless Otherwise Specified ±0.3

							△
							△
Date	Name	Description					NO
Drawn	Checked	Approved	SCI BOM No.		Model Name	ROCKER SWITCH	
曹盈芳			Customer No.		Model No.	SR13-292D3-01-BBGR-22GR0500E-4	Rev.
05/03/13	5/3/13	5/3/13	Unit	mm	SWEETA PRODUCTS CORPORATION		X0